

# KONTUR



PERFECTLY NATURAL.  
FUSION FINISH.  
CLINKER BODY.



8020/482

### **TRADITIONAL CLINKER LOOKS INTERPRETED WITH MODERN CONTOURING.**

Targeted highlighting for maximum effect. Contouring is the name of a style that is currently on trend, which gives a natural surface a particularly rounded and modern feel by means of strategic accentuation using the latest surface technology. Here, traditional clinker production techniques are combined with high-tech glaze technology to create a new generation of clinker brick slips: Manufactured in fusion finish.

In the classic DF/NF or long format, with three surfaces. Textures created using smooth engobes, characteristic water-struck surfaces or fire and melted effects with authentic signs of wear – with Kontur, traditional clinker looks have been interpreted and perfected with modern contouring.

# KONTUR

## EXPRESSIVE.

## NEXT-LEVEL BRICK SLIPS.

## THE BEST OF BOTH WORLDS.

### KONTUR EG




**470 beige engobed**  
 $\Delta < 3\%$  · DIN EN 14411, Gr. A<sub>1</sub>



DF



**470 beige engobed**  
 $\Delta < 3\%$  · DIN EN 14411, Gr. A<sub>1</sub>




DF long format 440 x 52 x 12 mm




**472 grey engobed**  
 $\Delta < 3\%$  · DIN EN 14411, Gr. A<sub>1</sub>




DF

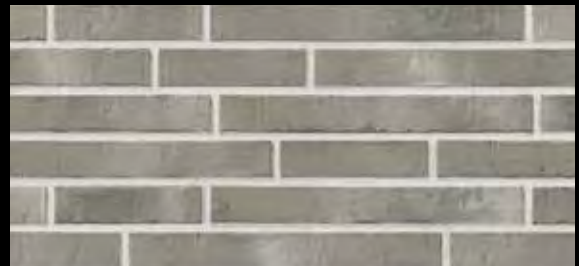

**472 grey engobed**  
 $\Delta < 3\%$  · DIN EN 14411, Gr. A<sub>1</sub>



DF long format 440 x 52 x 12 mm

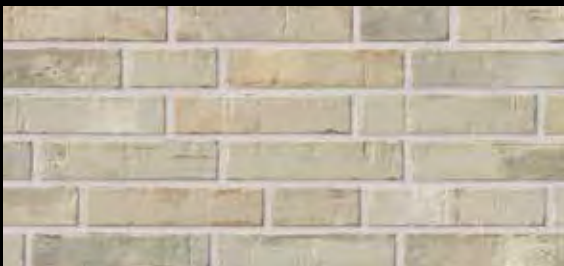

**471 beige-flashed engobed**  
 $\Delta < 3\%$  · DIN EN 14411, Gr. A<sub>1</sub>



DF



**473 grey-flashed engobed**  
 $\Delta < 3\%$  · DIN EN 14411, Gr. A<sub>1</sub>







DF

## PRODUCT DETAILS

### KONTUR EG

DIN EN 14411




format no.	8016	8018	8017	8122
description	clinker brick slips	clinker brick slips	corner <sup>1)</sup>	lintel angle
nominal size (cm)	DF	DF long format	DF	DF
production size (mm)	240 x 52 x 12	440 x 52 x 12	240 x 50 x 52 x 12	240 x 52 x 50 x 12
 <b>470 beige engobed</b>  <b>472 grey engobed</b>  <b>471 beige-flashed engobed</b>  <b>473 grey-flashed engobed</b>	★ PG 26 ●	★ PG 466 ●	★ PG 75 ●	★ PG 762 ●
pieces per bundle	52	32	22	18
pieces per m <sup>2</sup> /rm incl. joint	64,00	34,57	16,13	4
pieces per pallet	4.212	1.216	1.430	972
m <sup>2</sup> /rm per bundle	0,81	0,93	1,36	4,50
m <sup>2</sup> /rm per pallet	65,81	35,18	88,65	243,00
bundles per pallet	81	38	65	54
kg per pallet	1.323	681	508	484
kg per piece	0,314	0,560	0,355	0,498
kg per m <sup>2</sup> /rm	20,096	19,359	5,726	1,992
kg per bundle	16,328	17,920	7,810	8,964
surcharge	❖	❖	❖	❖

★ = Discount on pallets. ● = Normally available ex stock. PG = Price group (please see current price list). ❖ = Minimum quantity: each open box will incur a surcharge.

<sup>1)</sup> = The Ströher standard for angular accuracy in angled brick slips is based on the DIN 105 standard for exposed clinker brickwork, but with only 50% of the permissible tolerance values. The Ströher specification is thus +/- 1°. This equates to a maximum deviation of +/- 4 mm on the stretcher side and +/- 2 mm on the header side for a corner with the 240 x 115 mm format.

The formats shown are illustrative drawings and are not binding. All information without guarantee.

\* Ströher is the only German manufacturer offering a 25-year frost resistance guarantee on the following extruded products that have been correctly installed by a qualified professional tiler: Keraplatte® Selected, Keraplatte® Zoé, Keraplatte® Gravel Blend, Keraplatte® Epos, Keraplatte® Aera T, Keraplatte® Aera, Keraplatte® Roccia X, Keraplatte® Roccia, Keraplatte® Asar, Keraplatte® Terra, Keraplatte® Duro, Terrace slab TerioTec® X Profile, Terrace slab TerioTec® X, Terrace Slab TerioTec®, Stalotec®, Brickwerk, Brick 60, Wasserbrand, Kontur, Stiltreu, Riegel 50, Handstrich, Steinlinge, Glanzstücke, Zeitlos, Keraprotect® and Keravette®. Please find further explanations in our general terms and conditions.

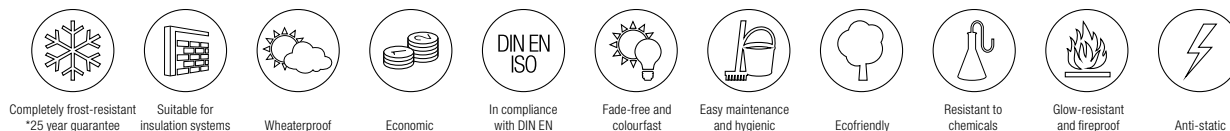

Completely frost-resistant  
\*25 year guarantee

Suitable for  
insulation systems

Weatherproof

Economic

In compliance  
with DIN EN

Fade-free and  
colourfast

Easy maintenance  
and hygienic

Ecofriendly

Resistant to  
chemicals

Glow-resistant  
and fireproof

Anti-static


# KONTUR EXPRESSIVE. NEXT-LEVEL BRICK SLIPS. THE BEST OF BOTH WORLDS.

## KONTUR CG



**480 beige-fired**  
△ < 3 % - DIN EN 14411, Gr. A<sub>1</sub>

DF

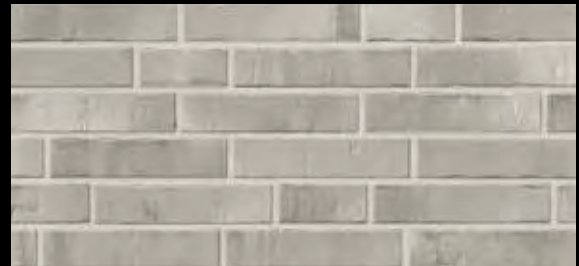

**482 grey-fired**  
△ < 3 % - DIN EN 14411, Gr. A<sub>1</sub>

DF



**481 sand-fired**  
△ < 6 % - DIN EN 14411, Gr. A<sub>1</sub>

DF



**483 brown-fired**  
△ < 3 % - DIN EN 14411, Gr. A<sub>1</sub>

DF

## PRODUCT DETAILS

### KONTUR CG

DIN EN 14411




format no.	8020	8021	8118
description	clinker brick slips	corner <sup>1)</sup>	lintel angle
nominal size (cm)	DF	DF	DF
production size (mm)	240 x 52 x 12	240 x 50 x 52 x 12	240 x 52 x 50 x 12
480 beige-fired			
481 sand-fired	★ PG 26 ●	★ PG 75 ●	★ PG 762 ●
482 grey-fired			
483 brown-fired			
pieces per bundle	52	22	18
pieces per m <sup>2</sup> /rm incl. joint	64,00	16,13	4
pieces per pallet	4.212	1.430	972
m <sup>2</sup> /rm per bundle	0,81	1,36	4,50
m <sup>2</sup> /rm per pallet	65,81	88,65	243,00
bundles per pallet	81	65	54
kg per pallet	1.323	508	484
kg per piece	0,314	0,355	0,498
kg per m <sup>2</sup> /rm	20,096	5,726	1,992
kg per bundle	16,328	7,810	8,964
surcharge	❖	❖	❖

★ = Discount on pallets. ● = Normally available ex stock. PG = Price group (please see current price list). ❖ = Minimum quantity: each open box will incur a surcharge.

<sup>1)</sup> = The Ströher standard for angular accuracy in angled brick slips is based on the DIN 105 standard for exposed clinker brickwork, but with only 50% of the permissible tolerance values. The Ströher specification is thus +/- 1°. This equates to a maximum deviation of +/- 4 mm on the stretcher side and +/- 2 mm on the header side for a corner with the 240 x 115 mm format.

The formats shown are illustrative drawings and are not binding. All information without guarantee.

\* Ströher is the only German manufacturer offering a 25-year frost resistance guarantee on the following extruded products that have been correctly installed by a qualified professional tiler: Keraplatte® Selected, Keraplatte® Zoé, Keraplatte® Gravel Blend, Keraplatte® Epos, Keraplatte® Aera T, Keraplatte® Aera, Keraplatte® Roccia X, Keraplatte® Roccia, Keraplatte® Asar, Keraplatte® Terra, Keraplatte® Duro, Terrace slab TerioTec® X Profile, Terrace slab TerioTec® X, Terrace Slab TerioTec®, Stalotec®, Brickwerk, Brick 60, Wasserbrand, Kontur, Stiltreu, Riegel 50, Handstrich, Steinlinge, Glanzstücke, Zeitlos, Keraprotect® and Keravette®. Please find further explanations in our general terms and conditions.

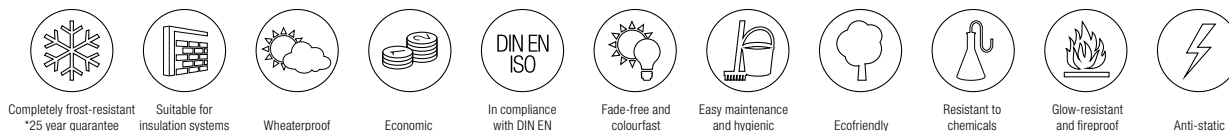

Completely frost-resistant  
\*25 year guarantee

Suitable for  
insulation systems

Weatherproof

Economic

In compliance  
with DIN EN

Fade-free and  
colourfast

Easy maintenance  
and hygienic

Ecofriendly

Resistant to  
chemicals

Glow-resistant  
and fireproof

Anti-static

# KONTUR EXPRESSIVE. NEXT-LEVEL BRICK SLIPS. THE BEST OF BOTH WORLDS.

## KONTUR WS



**490 sand-grey**  
Δ < 3 % · DIN EN 14411, Gr. A<sub>1</sub>

NF



**493 light red-flashed**  
Δ < 3 % · DIN EN 14411, Gr. A<sub>1</sub>

NF



**491 earth-grey**  
Δ < 6 % · DIN EN 14411, Gr. A<sub>1</sub> - I<sub>rel</sub> 1

NF



**494 red-flashed**  
Δ < 6 % · DIN EN 14411, Gr. A<sub>1</sub> - I<sub>rel</sub> 1

NF










**492 orange-flashed**  
Δ < 6 % · DIN EN 14411, Gr. A<sub>1</sub> - I<sub>rel</sub> 1

NF

## PRODUCT DETAILS

### KONTUR WS


DIN EN 14411		
format no.	8024	8025
description	clinker brick slips	corner <sup>1)</sup>
nominal size (cm)	NF	NF
production size (mm)	240 x 71 x 12	240 x 50 x 71 x 12
 <b>490 sand-grey</b>  <b>491 earth-grey</b>  <b>492 orange-flashed</b>  <b>493 light red-flashed</b>  <b>494 red-flashed</b>	★ PG 26 ●	★ PG 75 ●
pieces per bundle	39	22
pieces per m <sup>2</sup> /rm incl. joint	48,00	12,50
pieces per pallet	3.159	1.430
m <sup>2</sup> /rm per bundle	0,81	1,76
m <sup>2</sup> /rm per pallet	65,81	114,40
bundles per pallet	81	65
kg per pallet	1.327	694
kg per piece	0,420	0,485
kg per m <sup>2</sup> /rm	20,160	6,063
kg per bundle	16,380	10,670
surcharge	❖	❖

★ = Discount on pallets. ● = Normally available ex stock. PG = Price group (please see current price list). ❖ = Minimum quantity: each open box will incur a surcharge.

<sup>1)</sup> = The Ströher standard for angular accuracy in angled brick slips is based on the DIN 105 standard for exposed clinker brickwork, but with only 50% of the permissible tolerance values. The Ströher specification is thus +/- 1°. This equates to a maximum deviation of +/- 4 mm on the stretcher side and +/- 2 mm on the header side for a corner with the 240 x 115 mm format.

The formats shown are illustrative drawings and are not binding. All information without guarantee.

\* Ströher is the only German manufacturer offering a 25-year frost resistance guarantee on the following extruded products that have been correctly installed by a qualified professional tiler: Keraplatte® Selected, Keraplatte® Zoé, Keraplatte® Gravel Blend, Keraplatte® Epos, Keraplatte® Aera T, Keraplatte® Aera, Keraplatte® Roccia X, Keraplatte® Roccia, Keraplatte® Asar, Keraplatte® Terra, Keraplatte® Duro, Terrace slab TerioTec® X Profile, Terrace slab TerioTec® X, Terrace Slab TerioTec®, Stalotec®, Brickwerk, Brick 60, Wasserbrand, Kontur, Stiltreu, Riegel 50, Handstrich, Steinlinge, Glanzstücke, Zeitlos, Keraprotect® and Keravette®. Please find further explanations in our general terms and conditions.

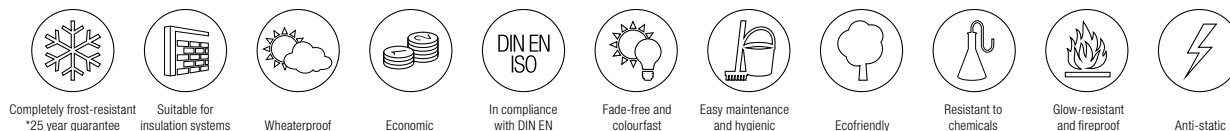

Completely frost-resistant  
\*25 year guarantee

Suitable for  
insulation systems

Weatherproof

Economic

In compliance  
with DIN EN

Fade-free and  
colourfast

Easy maintenance  
and hygienic

Ecofriendly

Resistant to  
chemicals

Glow-resistant  
and fireproof

Anti-static